

# Quick Installation Guide

Model # AKVM-S32



## Section 1

### Introduction

The **AKVM-S32** is a 2-port PS/2 type KVM switch that comes with two sets of 3-in-1 combo KVM cables. It enables users to access, control, boot, and reboot two computers using only one keyboard, video monitor, and mouse. Its slim-sized design offers more portability and convenience to users than conventional KVM switches.

## Section 2

### Installation



*Before connecting any cable, please make sure all of your computers and their peripherals have been powered off. Otherwise, the KVM switch may not be set up properly.*

**Step 1** Make sure all the computers that are to be connected to the KVM switch and their peripherals are powered-off. If not, power them off before you proceed with the following steps.

**Step 2** Connect the shared keyboard, monitor, and mouse to the main KVM unit. See Fig. 1.1

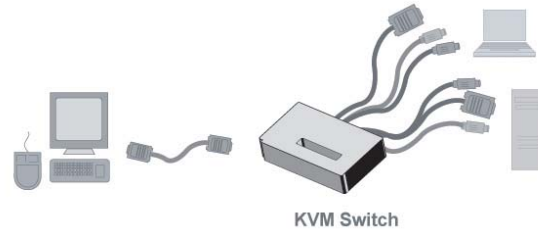


Fig 1.1

**Step 3** Connect each of your computers to the KVM switch using the provided 3-in-1 combo KVM cables. See Fig.1.2



Fig 1.2

You can use individual standard keyboard, mouse and video cables to extend the cable distance, but depending on the type of cables you use, the maximum cable distance is limited to 5 ~ 7 meters (15.5 ~ 23 feet).

**Step 4** Power up the connected computers one by one. After the computers are powered up, the keyboard and mouse will be recognized and you can begin operating the KVM switch.

## Section 3

### Operations

There are two methods to select a specific computer:

Using the **push button** or the **hotkey sequence**.

#### Push Button

The push button lets you directly switch between the computers. Simply press the button on the KVM unit to select the computer.

#### Hotkey Sequence

The hotkey sequence consists of three specific keystrokes pressed on the keyboard.

Hotkey sequence = **ScrLk + ScrLk + Command key**  
The two consecutive **ScrLk** key should be pressed within 2 seconds and the following command key(s) should also be pressed within 2 seconds. Otherwise, the hotkey sequence will not be validated.

For detailed Hotkey sequences and their corresponding functions, please refer to the Quick Reference Chart on back.

## Section 4

### Technical Support

Email: [support@airlink101.com](mailto:support@airlink101.com)

Toll Free: 1-888-746-3238

Website: [www.airlink101.com](http://www.airlink101.com)

## Quick Reference Chart

Command	Hotkeys	Front-Panel Button	Description
<b>Select PC</b>	ScrLk + ScrLk + (channel #) <sup>1</sup>		Select the active channel
<b>Next lower channel</b>	ScrLk + ScrLk + (up arrow)		Select the lower channel
<b>Next higher channel</b>	ScrLk + ScrLk + (down arrow)	Press the push button to rotate through the channel	Select the higher channel
<b>Previous PC channel</b>	ScrLk + ScrLk + (Backspace)		
<b>Reset KVM</b>	ScrLk + ScrLk + End		Reset the KVM Switch
<b>Autoscan</b>	ScrLk + ScrLk + S		Autoscan through every connected channel
<b>Stop Autoscan</b>	Any key on keyboard		Terminate Autoscan activity
<b>Autoscan with programmable delay time</b>	ScrLk + ScrLk + (x) <sup>2</sup>		Autoscan with a user-defined delay time within a range of 5 ~ 99 seconds

1: Press 1 or 2 for the for the channel #

2: x = 0 ~ 9

1 .. 10" ; 2 .. 20" ; 3 .. 30" ; 4 .. 40" ; 5 .. 50"

6 .. 60" ; 7 .. 70" ; 8 .. 80" ; 9 .. 90" ; 0 .. 99"